

BWS 2 TZ RAL 6027

FEATURES

- ✓ Bobbin wound filters with polyester resin and fiber glass.
- ✓ Filter color: RAL 6027.
- ✓ 1/4" air and water drain.
- ✓ Connections to six positions multiport valve with: filtration, backwash, rinse, recirculate, waste and closed operations.
- ✓ Transparent lid with v-clamp system.
- ✓ Maximum temperature: 50°C.
- ✓ Maximum pressure: 2.5 bar.


CARACTERÍSTICAS

- ✓ Filtros bobinados con resina de polyester y fibra de vidrio.
- ✓ Color del filtro: RAL 6027.
- ✓ Purga de agua y aire ¼".
- ✓ Conexiones para válvula selectora de seis vías con operaciones de: filtración, lavado, enjuague, recirculación, vaciado y cerrado.
- ✓ Tapa superior con cierre zuncho.
- ✓ Máxima temperatura: 50°C.
- ✓ Máxima presión: 2.5 bar.


FILTER DETAILS



▪ Cone diffuser
▪ Cono difusor

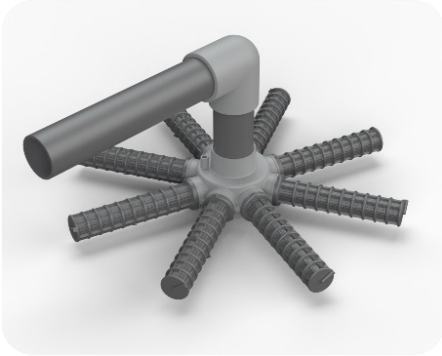


▪ Fitted with 1" laterals
▪ Equipado con brazos colectores 1"

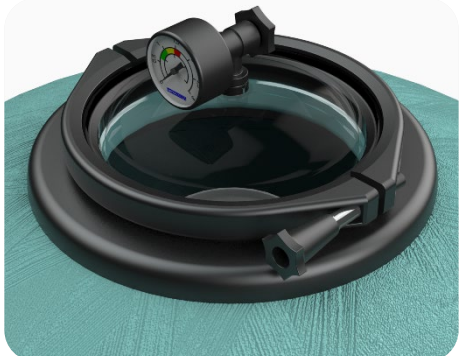

▪ Transparent top lid with V-clamp system
▪ Tapa superior transparente con cierre zuncho

Code	Model (mm)	Connections (mm/inch)		Filtering velocity (m³/h/m²)	Flow (m³/h)	Maximum pressure (bar)	Sand (0.4-0.8mm) (kg)	Gravel (1-2mm)	Net weight (kg)	D (mm)	H (mm)	M (mm)	N (mm)
		mm	inch										
66238CL96	400	50	1 ½"	50	6.5	2.5	60	-	10	420	710	280	125
66239CL96	500	50	1 ½"	50	9.5	2.5	100	-	15	520	755	295	125
66240CL96	600	50	1 ½"	50	15	2.5	160	-	20	620	830	325	125
71134CL96	660	50	1 ½"	50	17	2.5	210	-	27	674	934	380	125
66241CL96	750	63	2"	50	21	2.5	290	-	33	780	915	325	230
72207CL96	800	63	2"	50	25	2.5	330	-	45	830	940	325	230
66242CL96	900	63	2"	50	32	2.5	500	-	51	930	1060	400	230
66829CL96	1050	63	2"	50	43	2.5	550	250	65	1070	1250	500	270
66830CL96	1050	75	2 ½"	50	43	2.5	550	250	65	1070	1250	500	270
66831CL96	1200	75	2 ½"	50	56	2.5	750	300	90	1220	1340	545	270
66832CL96	1200	90	3"	50	56	2.5	750	300	90	1220	1340	545	270

Code	Units per pallet	Box dimension (cm)
66238CL96	15	44x44x71
66239CL96	10	54x54x75
66240CL96	8	63x63x86
71134CL96	8	69x69x87
66241CL96	2	78x78x106
72207CL96	2	80x80x106
66242CL96	2	95x95x112
66829CL96	1	115x115x145
66830CL96	1	115x115x145
66831CL96	1	130x130x150
66832CL96	1	130x130x150

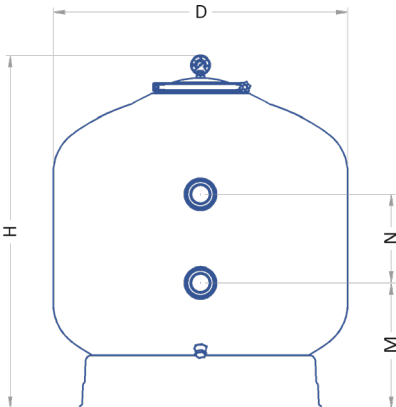

TESTED
ACCORDING TO
EN16713-1